



## GENERAL FEATURES

- Rack size **38x38 cm**
- Gross weight: 40 Kg
- Washing cycles / racks/hour: 90"-120"-180"-∞/  
40-30-20
- Bottom wash/rinse arm
- Top rinse arm
- Wash pump 200 W
- Boiler capacity 3 liters
- Tank capacity 10 liters
- Boiler heating element 2,8 Kw
- Tank heating element 2.4 Kw
- Water quantity per cycle 2 liters
- Electronic controls with color code switch
- Extractable control panel
- Useful washing height: 250 mm
- Magnetic door microswitch
- Automatic water filling
- Built-in electric rinse-aid dispenser
- Built-in electric detergent dispenser
- Hot rinse
- Thermostop function
- Anti back-flow valve
- Washing pump with Soft-start
- Automatic end-of-day self cleaning of wash tank

## FILTRATION

- Plastic wash pump filter, easily removable

## BODY

- AISI 304 stainless steel Body
- Single skinned body
- Preformed wash tank
- Double skinned door
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 304
- PVC protection rear the bottom front panel

## EQUIPMENT AS GLASSWASHER

- 2 glass racks 38x38 cm
- 1 cutlery small basket
- 1 insert for saucers
- 1 inlet hose (length 2 mt)
- 1 drain hose (length 2,5 mt)

## OPTIONAL

- Drain pump
- External rinse booster pump
- Cold rinse
- 60 Hz version

## ACCESSORIES FOR THE WATER TREATMENT

- Internal water softener ("S" version)

## ACCESSORIES

- Special racks (Round, diam. cm.38)

## INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

## MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided


## WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

## TECHNICAL SPECIFICATIONS

- Voltage: **220-240 V~50Hz**
- Total power : **3,0 kW**
- Amperage: **14 A**
- Power cord supply size: **3x1.5 mmq**

## AF 38.25E

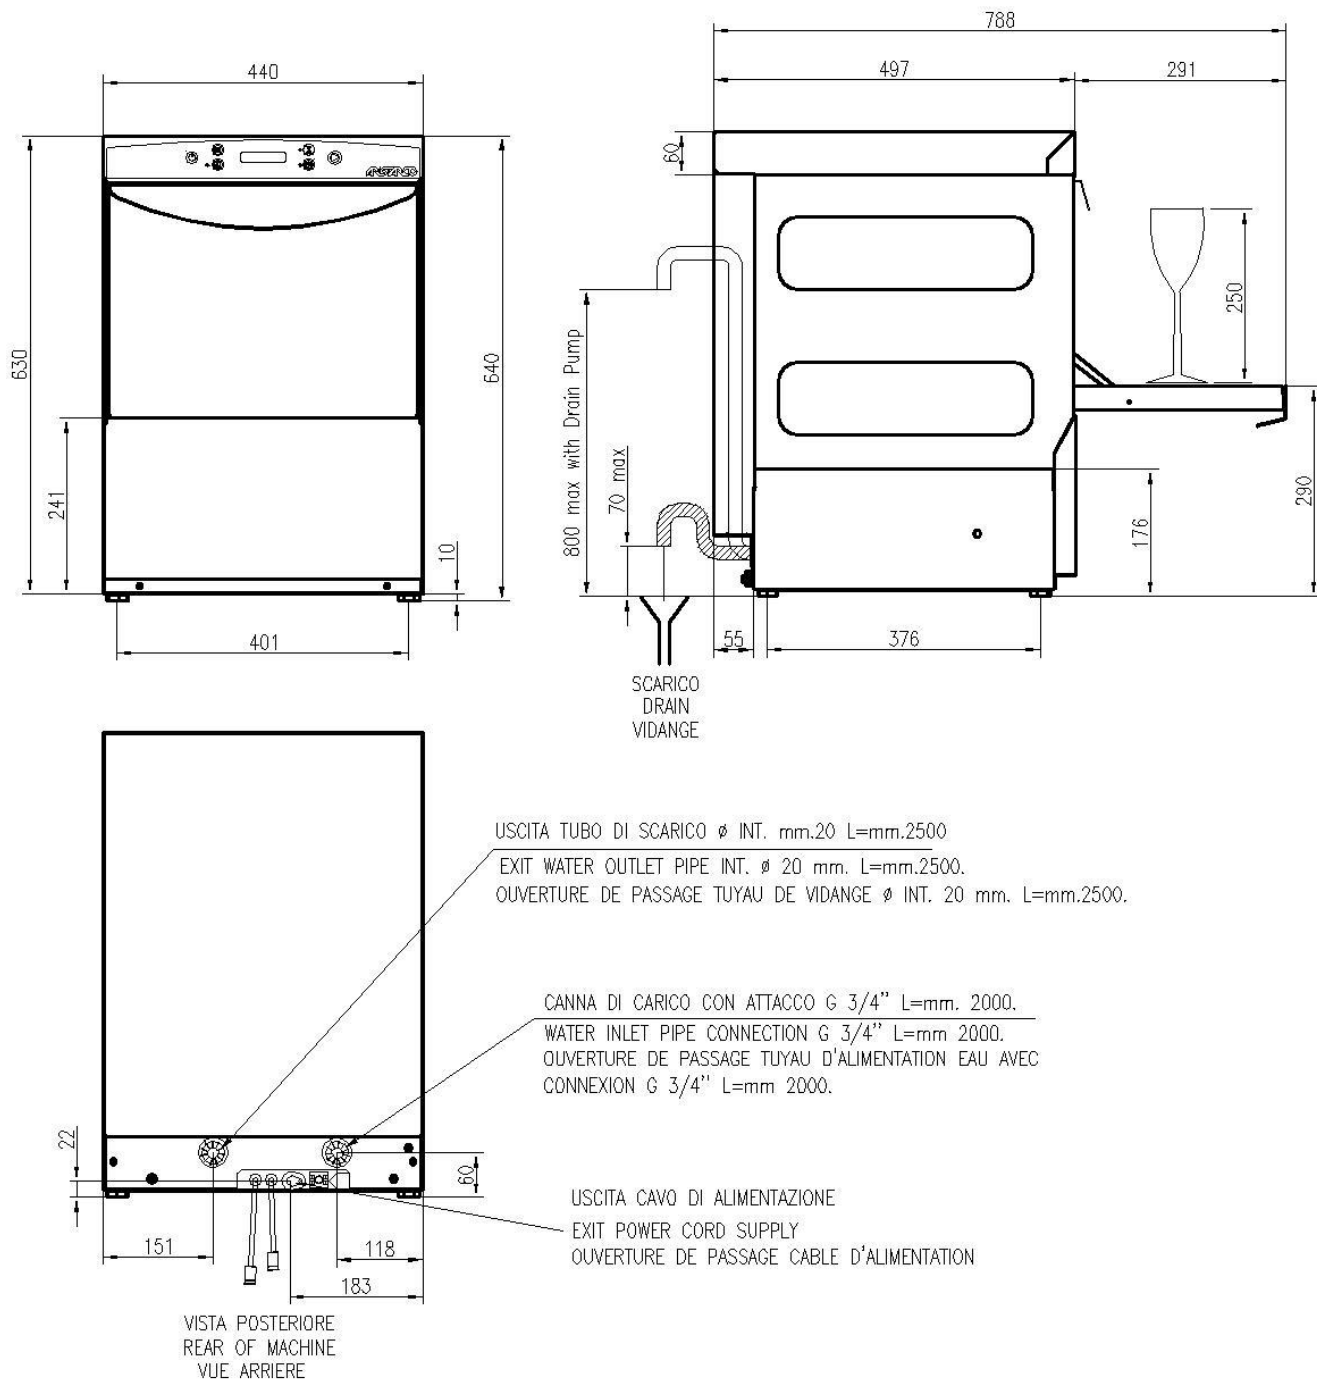

	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5÷20°f-2.8÷11°d