



GENERAL FEATURES

- Rack size **60x50 cm**
- Gross weight: 76 Kg
- Washing cycles / racks/hour : 90"-120"-180"-∞/
40-30-20
- Top and bottom wash/rinse arms
- Wash pump 680 W
- Boiler capacity 5 liters
- Tank capacity 22 liters
- Boiler heating element 4,5 kW
- Tank heating element 2,4 kW
- Water quantity per cycle: 2 liters
- Electronic control with color code switch
- Extractable control panel
- Useful washing height: 400 mm
- Magnetic door microswitch
- Automatic water filling
- Built-in electric rinse-aid dispenser
- Built-in electric detergent dispenser
- Hot rinse
- Thermostop function
- Anti back-flow valve
- Automatic end-of-day self-cleaning water tank
- Washing pump with Soft-Start
- Green function during pauses

FILTRATION

- Plastic wash pump filter, easily removable

BODY

- AISI 304 stainless steel Body
- Double skinned body
- Preformed rack guides
- Preformed wash tank
- Double skinned door
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 304
- PVC protection rear the bottom front panel

EQUIPMENT

- 1 plates rack 60x50 cm (22 plates)
- 1 glass rack 60x50 cm.
- 1 cutlery small basket
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2,5 m)

OPTIONAL

- Drain pump
- Rinse booster pump
- Cold rinse
- S/s tank filters for pre-filtering of tank water
- Boiler heating element 6 kW
- Commutable voltage
- 60 Hz version

ACCESSORIES FOR THE WATER TREATMENT

- Internal water softener ("S" version)

ACCESSORIES

- Supporting s/s stand h. 545mm. for basket
- Special racks

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided


WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

TECHNICAL SPECIFICATIONS

- Voltage: **380-415V3N/220-240V3/220-240V~50 Hz**
- Total power : **5,18 kW**
- Amperage: **8 A / 13 A / 23 A**
- Power cord supply size : **5x2,5 / 3 x 4 mmq**

AS 60.40E

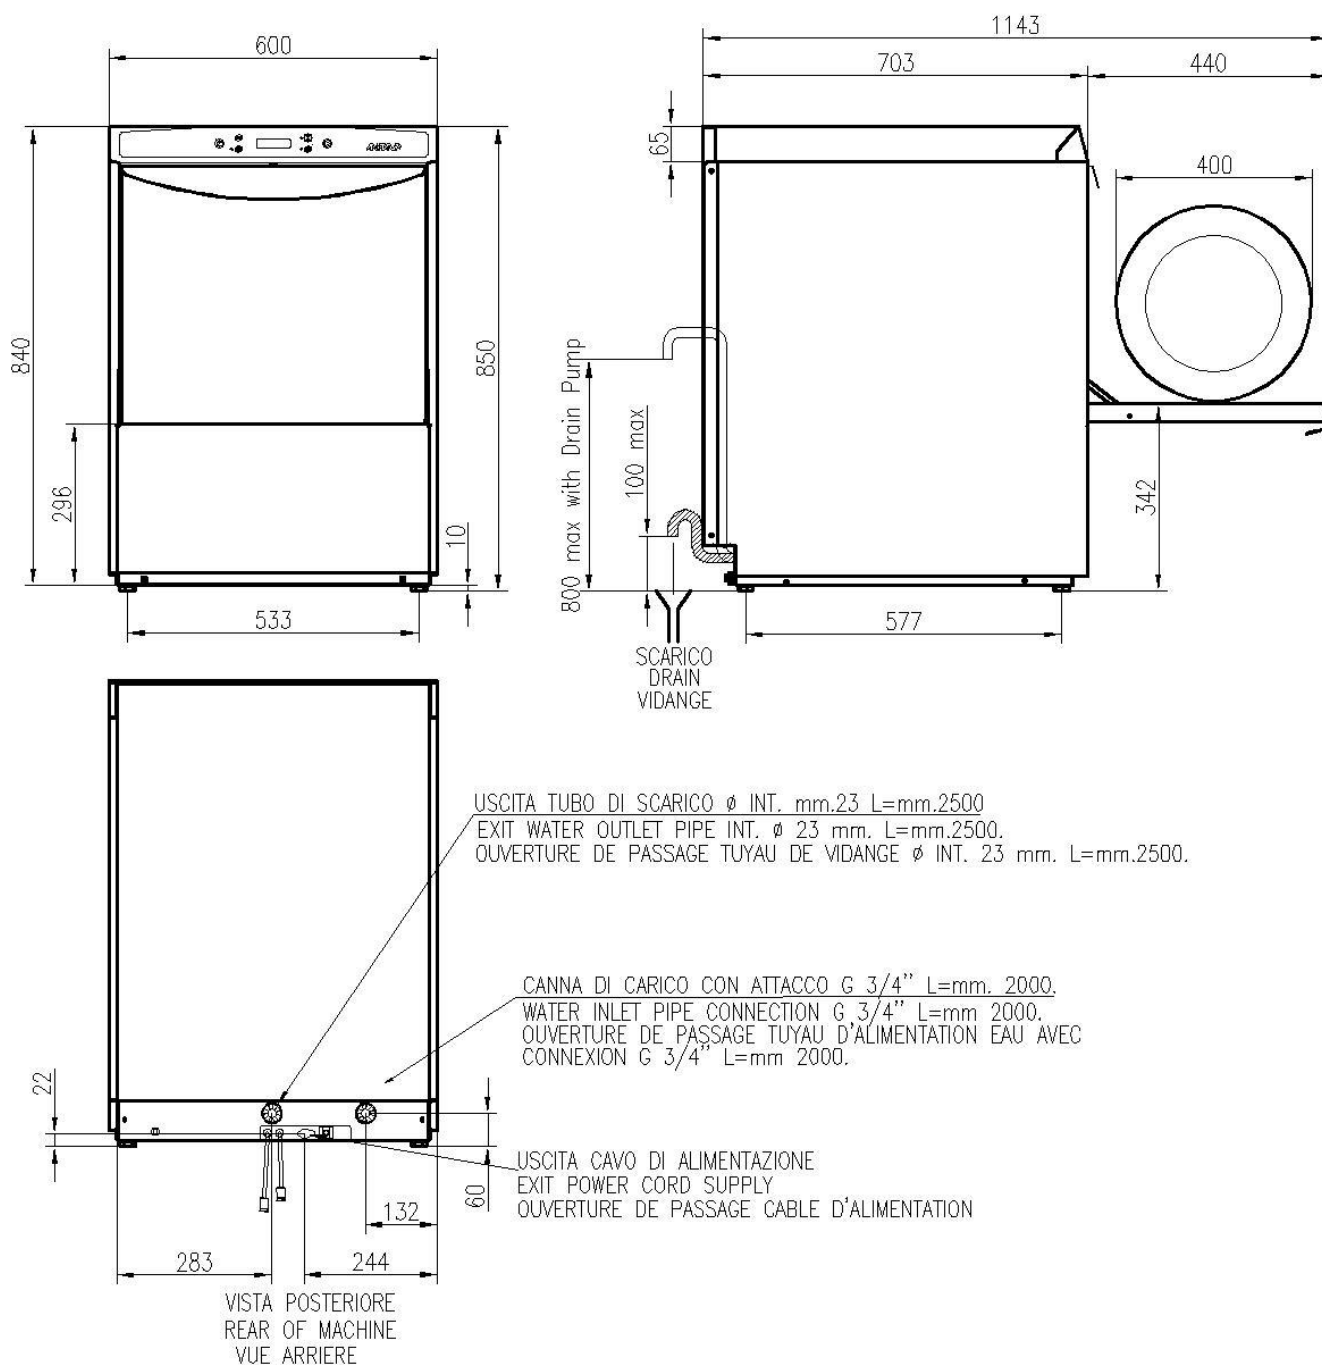

	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5±20f-2.8±11'd