



## GENERAL FEATURES

- S/S Rack **56.5x69 cm**
- Total weight: 195 Kg.
- Washing cycles / racks/hour : 3'-6'-9' / 20-10-7
- 3-way s/s upper and lower rotating wash arms
- Independent rotating upper and lower rinse arms
- Wash pump: 1.5 kW
- Boiler capacity: 11 lt
- Tank capacity: 65 lt
- Boiler heating element: 6 kW
- Tank heating element: 6 kW
- Water quantity per cycle: 3,5 lt
- Electromechanical control panel
- Tank and boiler temperature gauges
- Useful washing height: 800 mm
- Door microswitch
- Automatic filling of water, direct into the tank
- Hot rinse
- Rinse booster pump
- Break Tank incorporated according to EN 1717
- Atmospheric boiler
- Vertical self-cleaning washing pump

## WATER FILTRATION

- Pre-filtering of tank water made of no.1 s/s mesh basket filter
- S/S inle wash pump filter, easily removable

## BODY

- Body in stainless steel
- Double skinned body and door, insulated
- S/S door handle
- Preformed wash tank in s/s AISI 316
- S/S removable upper and lower wash/rinse arms for easy cleaning
- Boiler in s/s AISI 316

## EQUIPMENT

- 1 s/s rack on wheels 56.5x69 cm
- 1 water inlet hose ( 1,5 mt length )
- 1 water drain hose ( 2 mt length )

## OPTIONALS

- Electric detergent dispenser
- Electric rinse-aid dispenser
- Drain pump
- Hot water filling (max 85°C)
- 60 Hz version

## ACCESSORIES FOR WATER TREATMENT

- Water softener unit – external fitting

## ACCESSORIES

- S/S special racks for trays

## INSTALLATION

- Level the machine acting on the adjustable feet

## ELECTRIC CONNECTION

- The mains voltage must be the one indicated on the serial no. label
- The machine must be connected to a suitable earthing system
- Connect the power plug to a suitable omnipolar wall switch


## WATER CONNECTION

- Connect a water softener in case of hard water
- The water pressure must be between 0.1MPa (1 bar) and 5MPa (5bar).
- The water temperature must be between 10 and 50°C

## TECHNICAL SPECIFICATIONS

- Voltage: **380-415 V3N / 220-240V3~ 50Hz**
- Total power : **7.5 kW**
- Amperage: **13 A / 20 A**
- Power cord supply size. : **5 x 4 mmq**

## AU 55-80 PRS

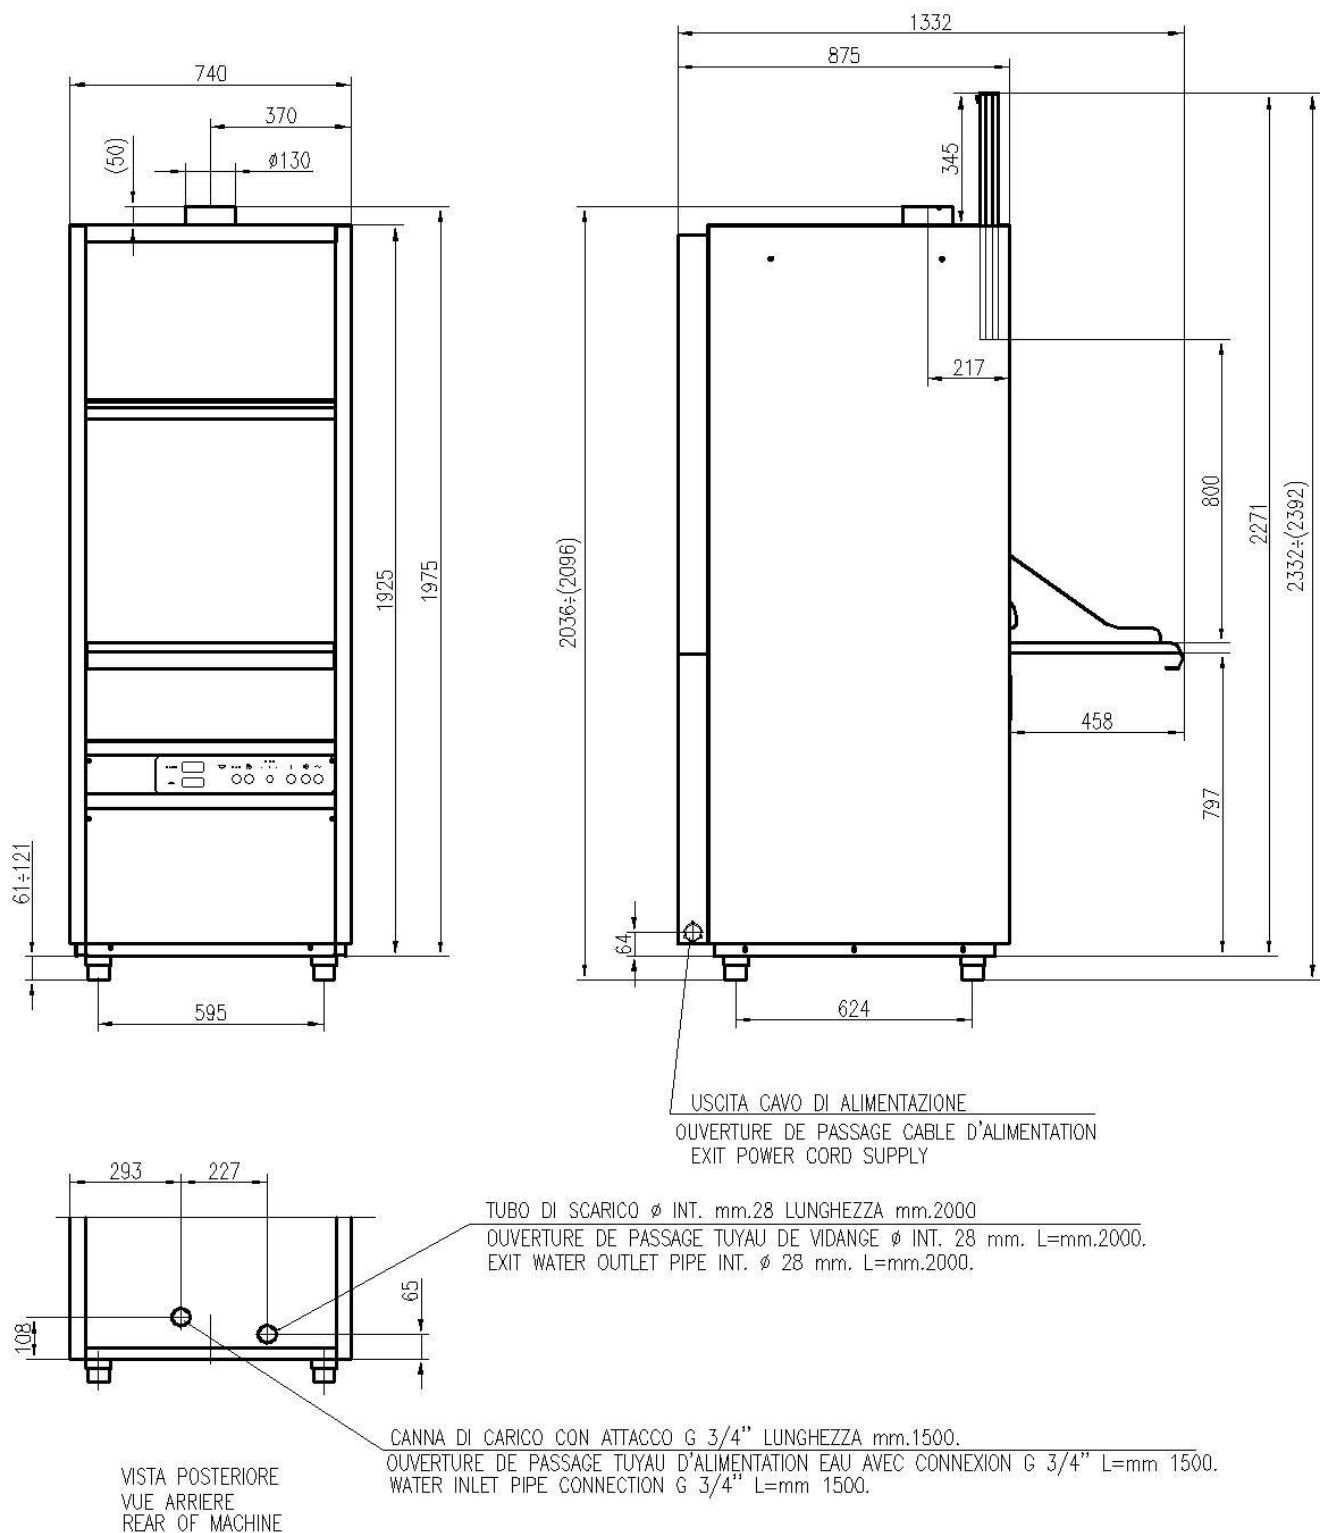

	Min 10°C-MAX 50°C
	Min 10°C-MAX 25°C with ENERGY RECOVERY
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5÷20°f-2.8÷11°d