



GENERAL DETAILS

- Rack dimensions: **50x50 cm**
- Total weight: 197,5 Kg
- Washing cycles / racks/hour: 60"-120"-180"-9'/60-30-20-7
- Possibility of automatic start of washing cycle by closing the hood
- Upper and lower rotating wash/rinse arms with stainless steel tube
- Wash pump: 1.300 W
- Boiler capacity: 11 lt
- Tank capacity: 40 lt
- Boiler heating elements: 9,0 kw
- Tank heating elements: 4.5 kw
- Water quantity per cycle: 2,5 lt
- Electronic controls with LCD display
- Useful washing height: 415 mm
- Magnetic hood microswitch
- Automatic filling of water
- Double electric detergent and rinse aid dispenser
- Hot rinse
- Thermostop function
- Vertical self-cleaning washing pump
- PRS System (Atmospheric Boiler+break tank)
- ES System (Energy Saving System)
- Green Function for energy saving
- Self-cleaning cycle at the end of the day

WATER FILTRATION

- Pre-filtering of tank water by means of no. 1 stainless steel filter
- Single wash pump filter, easily removable

BODY

- AISI 304 stainless steel body
- Preformed wash tank with rounded corners
- Single skin hood
- Hood opening system with springs
- Removable upper and lower wash/rinse arms for easy cleaning
- Boiler in AISI 316 stainless steel

EQUIPMENT

- 2 racks 50x50 cm, 12/18 plates
- 1 glass rack 50x50 cm
- 2 cutlery baskets
- 1 inlet hose (2 m lenght)
- 1 drain hose (2 m lenght)
-

OPTIONALS

- Drain pump
- HD Version (Total power 14,8 kW, 380-415V3N only)
- 60 Hz version
- Kit remote control system
-

ACCESSORIES FOR WATER TREATMENT

- Integrated water softener unit ("S" model)

ACCESSORIES

- Entry / exit tables in stainless steel
- Pre-wash tables in stainless steel
- Special basket
- Special baskets

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided


WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.1MPa (1 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 25°C

TECHNICAL SPECIFICATIONS

- Voltage: **380-415 V3N ~ / 220-240 V3~ 50 Hz**
- Total power: **10,3 Kw**
- Amperage: **15 A / 26 A**
- Power cord supply size: **5x4 mmq**

AH 1240^E ES

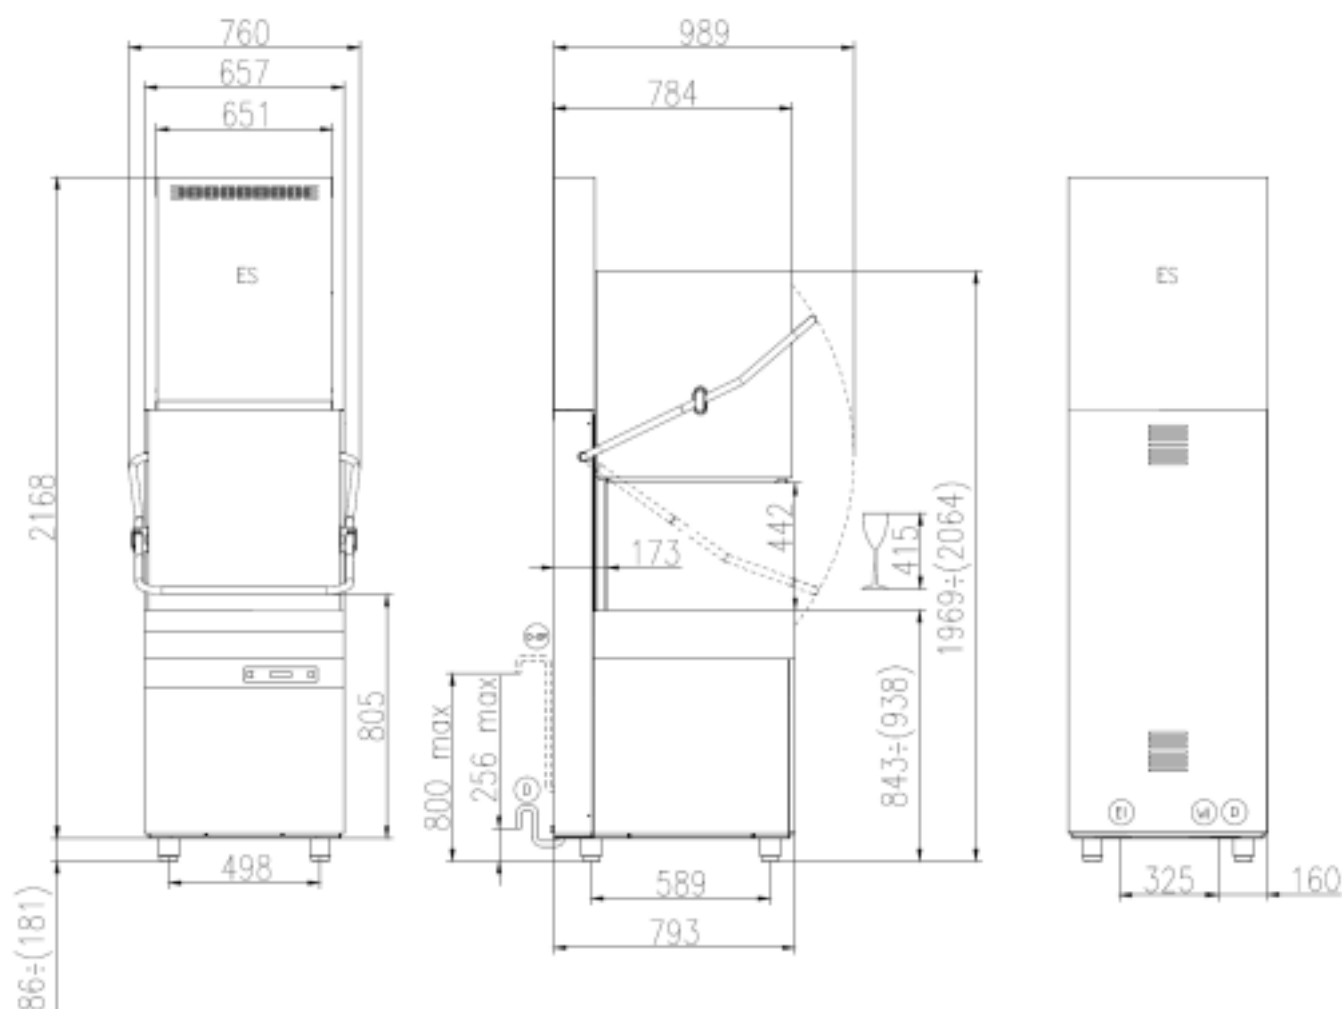

CAVO DI ALIMENTAZIONE
POWER CORD SUPPLY
CÂBLE D'ALIMENTATION
CABLE DE ALIMENTACION



ORNA DI CARICO G 3/4" L=2000 mm
G 3/4" INLET HOSE L=2000 mm
TUYAU D'ALIMENTATION G 3/4" L=2000 mm
TUBO DE ALIMENTACION G 3/4" L=2000 mm



TUBO DI SCARICO ø 40 mm L=2000 mm
DRAIN HOSE ø 40 mm L=2000 mm
TUYAU DE VIDEAGE ø 40 mm L=2000 mm
TUBO DE DESAGUE ø 40 mm L=2000 mm



TUBO DI SCARICO ø 29 mm L=2500 mm (CON POMPA SCARICO)
DRAIN HOSE ø 29 mm L=2500 mm (WITH DRAIN PUMP)
TUYAU DE VIDEAGE ø 29 mm L=2500 mm (AVEC POMPE DE VIDEAGE)
TUBO DE DESAGUE ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

FC	Min 10°C-MAX 50°C
FC	Min 10°C-MAX 25°C with ENERGY RECOVERY
P	200÷500Pa(2÷5 Bar)
P	100÷500Pa(1÷5 Bar) with ATMOSPHERE FILTER
W	WARRANTY 5-307-28-1174