



GENERAL FEATURES

- Rack size 66x81.5 cm
- Gross weigh: 227,5 Kg
- Washing cycle/racks/hour:
- 3'-6'-9' / 20-10-7
- Stainless steel wash and rinse arms
- Wash pump: 2,3 Kw
- Boiler capacity: 11 litri
- Tank capacity: 65 litri
- Boiler heating element: 6 Kw
- Tank heating element: 6 Kw
- Water quantity per cycle 3,5 litri
- Elettromeccanical controls
- Temperature indicators for tank and boiler
- Useful washing height: 650 mm
- Magnetic door microswitch
- Automatic water filling
- Hot rinse
- Thermostop function
- Self-cleaning vertical pump
- PRS system (Atmospheric Boiler+Break tank)

FILTRATION

- Pre-filtering of the tank water by means of no. 1 stainless steel filter equipped with collection basket
- Pump filter in stainless steel, easily removable

BODY

- AISI 304 stainless steel Body
- Double skinned insulated body
- Preformed wash tank AISI 316
- Preformed rack guides
- Door handle in s/s
- Wash/rinse arms in s/s, easily removable
- Boiler in s/s AISI 316

EQUIPMENT AS GLASSWASHER

- 1 stainless steel rack 66x81.5 cm with wheels
- 1 inlet hose (length 2 m)
- 1 drain hose (length 2 m)

OPTIONAL

- Double electric detergent and rinse dispenser
- HD version (P.Tot. 14,3 kW, 380-415V3N ~ only)
- Drain pump
- Hot water filling
- 60 Hz version

ACCESSORIES FOR WATER TREATMENT

- External softener

ACCESSORI

- Stainless steel supports for special tray washing dim. up to cm. 60x80

INSTALLATION

- Use the screws of the feet and a spirit level to ensure that the machine is levelled

MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided


WATER SUPPLY CONNECTION

- A water softener must be installed if the water is hard
- The water pressure must be between 0.2MPa (2 bar), and, 0.5MPa (5 bar)
- The temperature of the water-supply must be between 10°C to 50°C

SPECIFICHE TECNICHE

- Voltage: **380-415 V3N ~ 50 Hz**
- Total power: **8,3 kW**
- Amperage: **12 A**
- Power cord supply size: **5 x 4 mmq**

AU 65.65 PRS

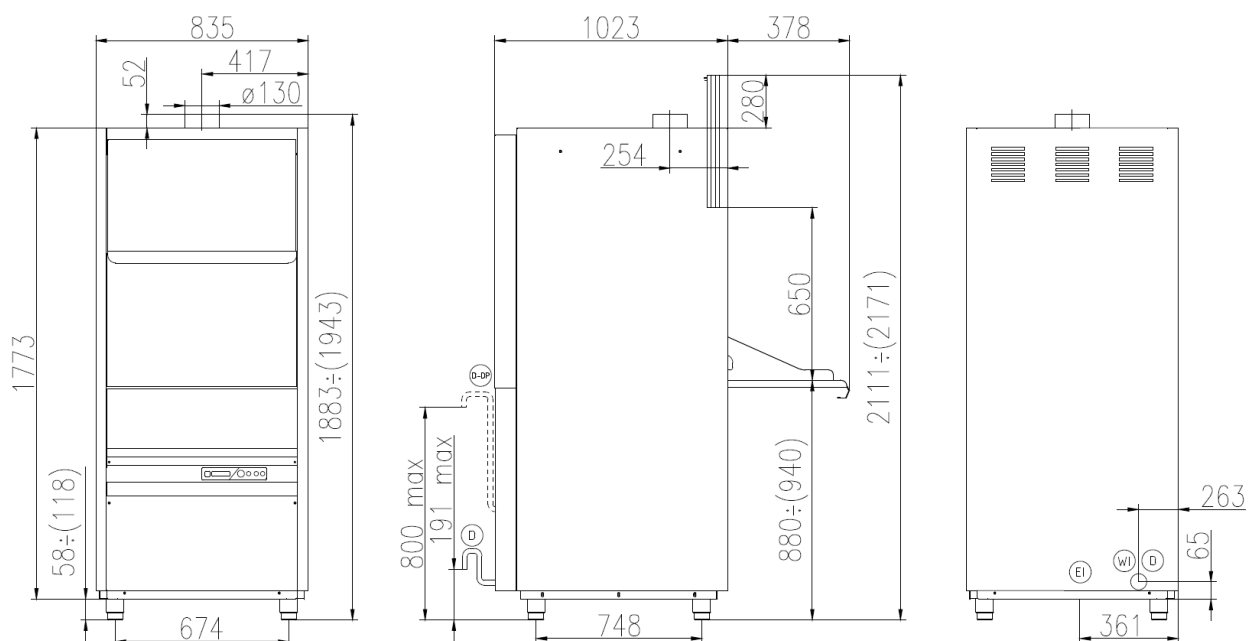

EI
 CAVO DI ALIMENTAZIONE
 POWER CORD SUPPLY
 CABLE D'ALIMENTATION
 CABLE DE ALIMENTACION

WI
 CANNA DI CARICO G 3/4 L=2000 mm
 G 3/4 INLET HOSE L=2000 mm
 TUYAU D'ALIMENTATION G 3/4" L=2000 mm
 TUBO DE ALIMENTACION G 3/4" L=2000 mm

D
 TUBO DI SCARICO Ø 40 mm L=2000 mm
 DRAIN HOSE Ø 40 mm L=2000 mm
 TUYAU DE VIDANGE Ø 40 mm L=2000 mm
 TUBO DE DESAGUE Ø 40 mm L=2000 mm

D-DP
 TUBO DI SCARICO Ø 29 mm L=2500 mm (CON POMPA SCARICO)
 DRAIN HOSE Ø 29 mm L=2500 mm (WITH DRAIN PUMP)
 TUYAU DE VIDANGE Ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)
 TUBO DE DESAGUE Ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

| |
|---|
| Min 10°C-MAX 50°C |
| Min 10°C-MAX 25°C with ENERGY RECOVERY |
| 200÷500kPa(2÷5 Bar) |
| 100÷500kPa(1÷5 Bar) with ATMOSPHERIC BOILER |
| HARDNESS 5÷20f-2.8÷11'd |